

Our Heavy-Duty Hydraulic Stabilization Legs Rock!



Power-Packer legs can help you prevent downtime, improve productivity, and maximize worker and equipment safety on your jobsite.


Power-Packer offers robust hydraulic stabilization legs to safely support and level heavy equipment in the harshest environments. From drill rigs and rough terrain cranes to mobile crushing units and specialty trailers, our hydraulic stabilizing legs safely and reliably support and level even the most extreme equipment applications. Power-Packer legs arrive fully assembled with integrated valve blocks to reduce your installation time. Our legs and mounting brackets can also be customized to meet your exact specifications.

- All-weather design with powerful loading capabilities
- Easy to install
- Integrated load-holding valves eliminate potential for catastrophic failure
- Mechanical load holding up to 170,000 lbs.
- Hydraulic lifting capacity up to 85,000 lbs., with best-in-class side loading capability
- Optional mechanical locking for maximum safety and flexibility
- 5" and 6" bore sizes
- Stroke lengths from 12" to 36"
- All mechanically locking

Power-Packer engineers can design a custom solution for virtually any on- or off-highway application. Call us at 800.745.4142 or visit powerpacker.com.



POWER-PACKER®

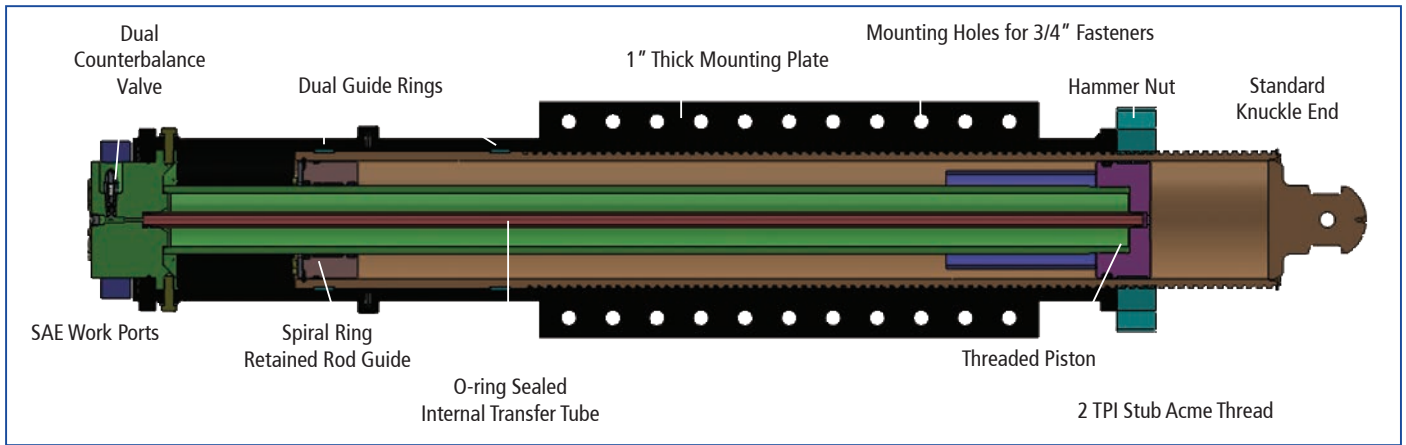

Power-Packer Heavy-Duty Hydraulic Stabilization Legs *(Dimensions listed in inches/mm)*

All Power-Packer Heavy-Duty Legs Are Mechanically Locking


Mechanical Load Rating 115,000 lbs | 512 kN — Hydraulic Load Rating @3000 psi (207 bar): 58,000 lbs | 258 kN

Part #	Bore	Stroke	Mounting Height*	Overall Height*	Bracket Width	Bracket Height	Hole Width	# Mounting Holes**	Side Load
9010001341	5.0 127	12.0 304.8	25.88 657.35	33.25 844.5	12.0 304.8	16.5 419.1	10.0 254	14	20%
9010001347	5.0 127	18.0 457.2	34.75 882.65	41.25 1047.7	12.0 304.8	25.5 647.7	10.0 254	22	20%
9010001345	5.0 127	24.0 609.6	34.75 882.65	50.25 1276.3	12.0 304.8	25.5 647.7	10.0 254	22	20%
9010001346	5.0 127	36.0 914.4	34.75 882.65	59.25 1504.9	12.0 304.8	25.5 647.7	10.0 254	22	10%

Mechanical Load Rating 170,000 lbs | 756 kN — Hydraulic Load Rating @ 3000 psi (207 bar): 85,000 lbs | 378 kN

9010001290	6.0 152.4	12.0 304.8	25.88 657.35	33.25 844.5	12.0 304.8	16.5 419.1	10.0 254	14	20%
9010001292	6.0 152.4	18.0 457.2	34.75 882.65	41.25 1047.7	12.0 304.8	25.5 647.7	10.0 254	22	20%
9010001293	6.0 152.4	24.0 609.6	34.75 882.65	50.25 1276.3	12.0 304.8	25.5 647.7	10.0 254	22	20%
9010001294	6.0 152.4	36.0 914.4	34.75 882.65	59.25 1504.9	12.0 304.8	25.5 647.7	10.0 254	22	10%

* Includes 1/2" (12.7 mm) thick plate ** Use 3/4" Grade 8 Fasteners (20 mm class 10.9)

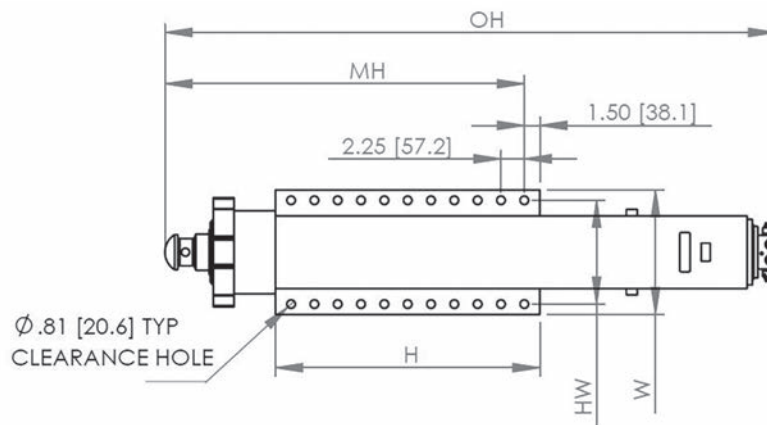

Call 800.745.4142 today to discuss your custom solution.

POWER-PACKER®

© 2019, Power-Packer. All rights reserved. PP0101025-1219

Power-Packer, 516 Hillcrest Drive, Westfield, WI 53964 | 800.745.4142 | info@powerpacker.com | powerpacker.com